


ILULA®

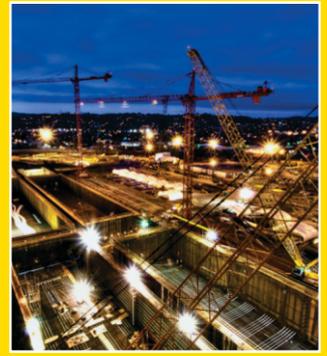

GRADE 80 CHAIN SLINGS

Chain slings are the classic and widely used load handling attachment for a wide variety of lifting applications. They feature flexibility and extremely high durability.

NEW PRODUCT TO OUR RANGE


We offer complete chain slings and components as well as corresponding accessories and spare parts. Chain slings made to order according to your requirements.

All lifting components are uniformly marked with equivalent chain size and grade. Safety factor: 4:1

1 LEG SLING



2 LEG SLING

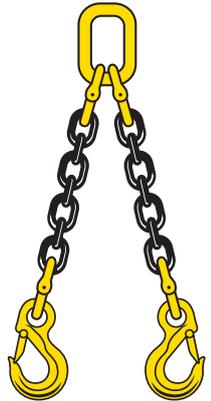

| | WORKING LOAD LIMITS | | | | | | | | | |
|-------------------------------|---------------------|---------|-------|-------|-----------|-------|-------|----------|-------|-------|
| | One Leg | Two Leg | | | Three Leg | | | Four Leg | | |
| Angle from vertical - β | 0° | 30° | 45° | 60° | 30° | 45° | 60° | 30° | 45° | 60° |
| Angle between legs - α | - | 60° | 90° | 120° | - | - | - | 60° | 90° | 120° |
| Chain Dia. (mm) | t | t | t | t | t | t | t | t | t | t |
| 7 | 1.50 | 2.55 | 2.10 | 1.50 | 3.90 | 3.15 | 2.25 | 3.90 | 3.15 | 2.25 |
| 10 | 3.15 | 5.35 | 4.41 | 3.15 | 8.19 | 6.62 | 4.72 | 8.19 | 6.62 | 4.72 |
| 13 | 5.30 | 9.00 | 7.42 | 5.30 | 13.78 | 11.13 | 7.95 | 13.78 | 11.13 | 7.95 |
| 16 | 8.00 | 13.60 | 11.20 | 8.00 | 20.80 | 16.80 | 12.00 | 20.80 | 16.80 | 12.00 |
| 20 | 12.50 | 21.25 | 17.50 | 12.50 | 32.50 | 26.25 | 18.75 | 32.50 | 26.25 | 18.75 |
| Factor | 1.0 | 1.7 | 1.4 | 1.0 | 2.6 | 2.1 | 1.5 | 2.6 | 2.1 | 1.5 |



3 LEG SLING



4 LEG SLING

